



AMBASSADOR CONSTRUCTION CO., INC.

June 10, 1999

Mr. Walter Weems
Silverstein Properties Inc.
7 World Trade Center
New York, NY 10048

Re: Mayor's Office of Emergency Management
7 World Trade Center
Change Order #088
Amb. Job #S57-5175

Dear Mr. Weems:


We are pleased to submit herewith our change order #088 to perform the following work at the above referenced premises for the sum of ONE HUNDRED TWENTY THOUSAND NINE HUNDRED FIFTY SEVEN DOLLARS (\$120,957.00):


We have carefully surveyed the new fuel oil piping route as per the following:

- The eight inch conduit which will carry the 1 1/4" supply, return and overflow pipe, will run through the second floor machine room corridor into the building communications room and above the lobby ceiling to the fuel oil tank room.
- In order for this work to be done, building ductwork must be removed and re-routed. Also other electrical piping will have to be relocated. The double door for the communications room will be removed and replaced by a single door.
- The ceiling lobby sheetrock ceiling will be removed and replaced after the piping is installed.
- The lobby area in front of the handicap elevators will have scaffolding so the different trades can work while we keep the elevators operational.
- All work is to be performed on normal working hours, except for the scaffolding work. There is no overtime included in the other costs.

Continued. . .

317 MADISON AVENUE • NEW YORK, NY 10017 • 212 922-1020 • FAX 212 849 9762

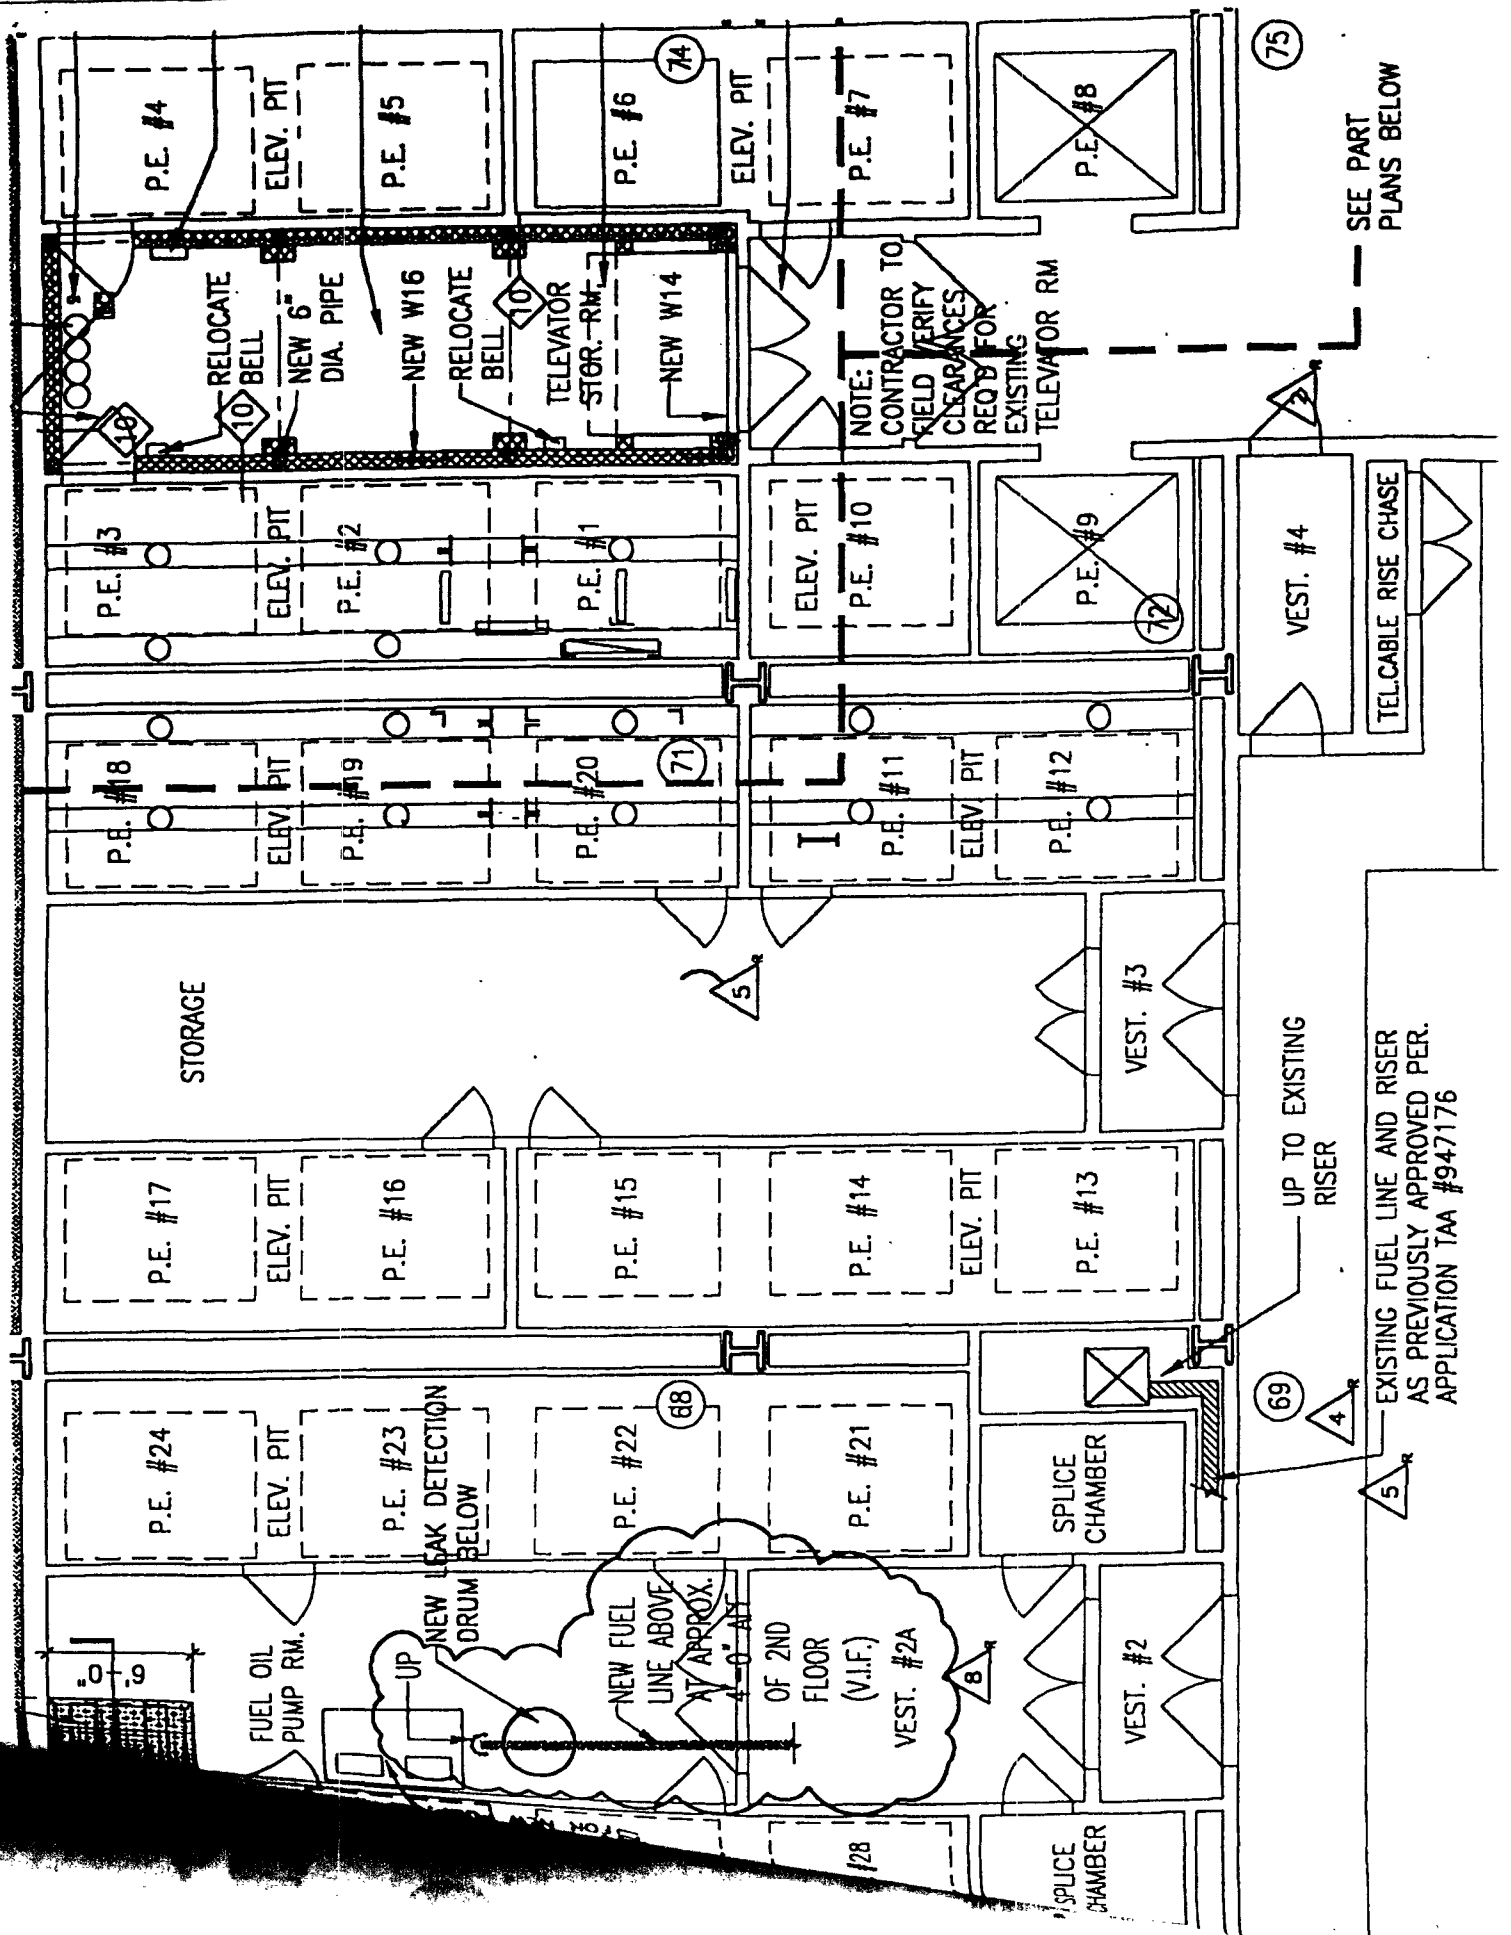




08/18/99 09:32 FAX 2122190258

SWANKE HAYDEN CONNELL

004/004

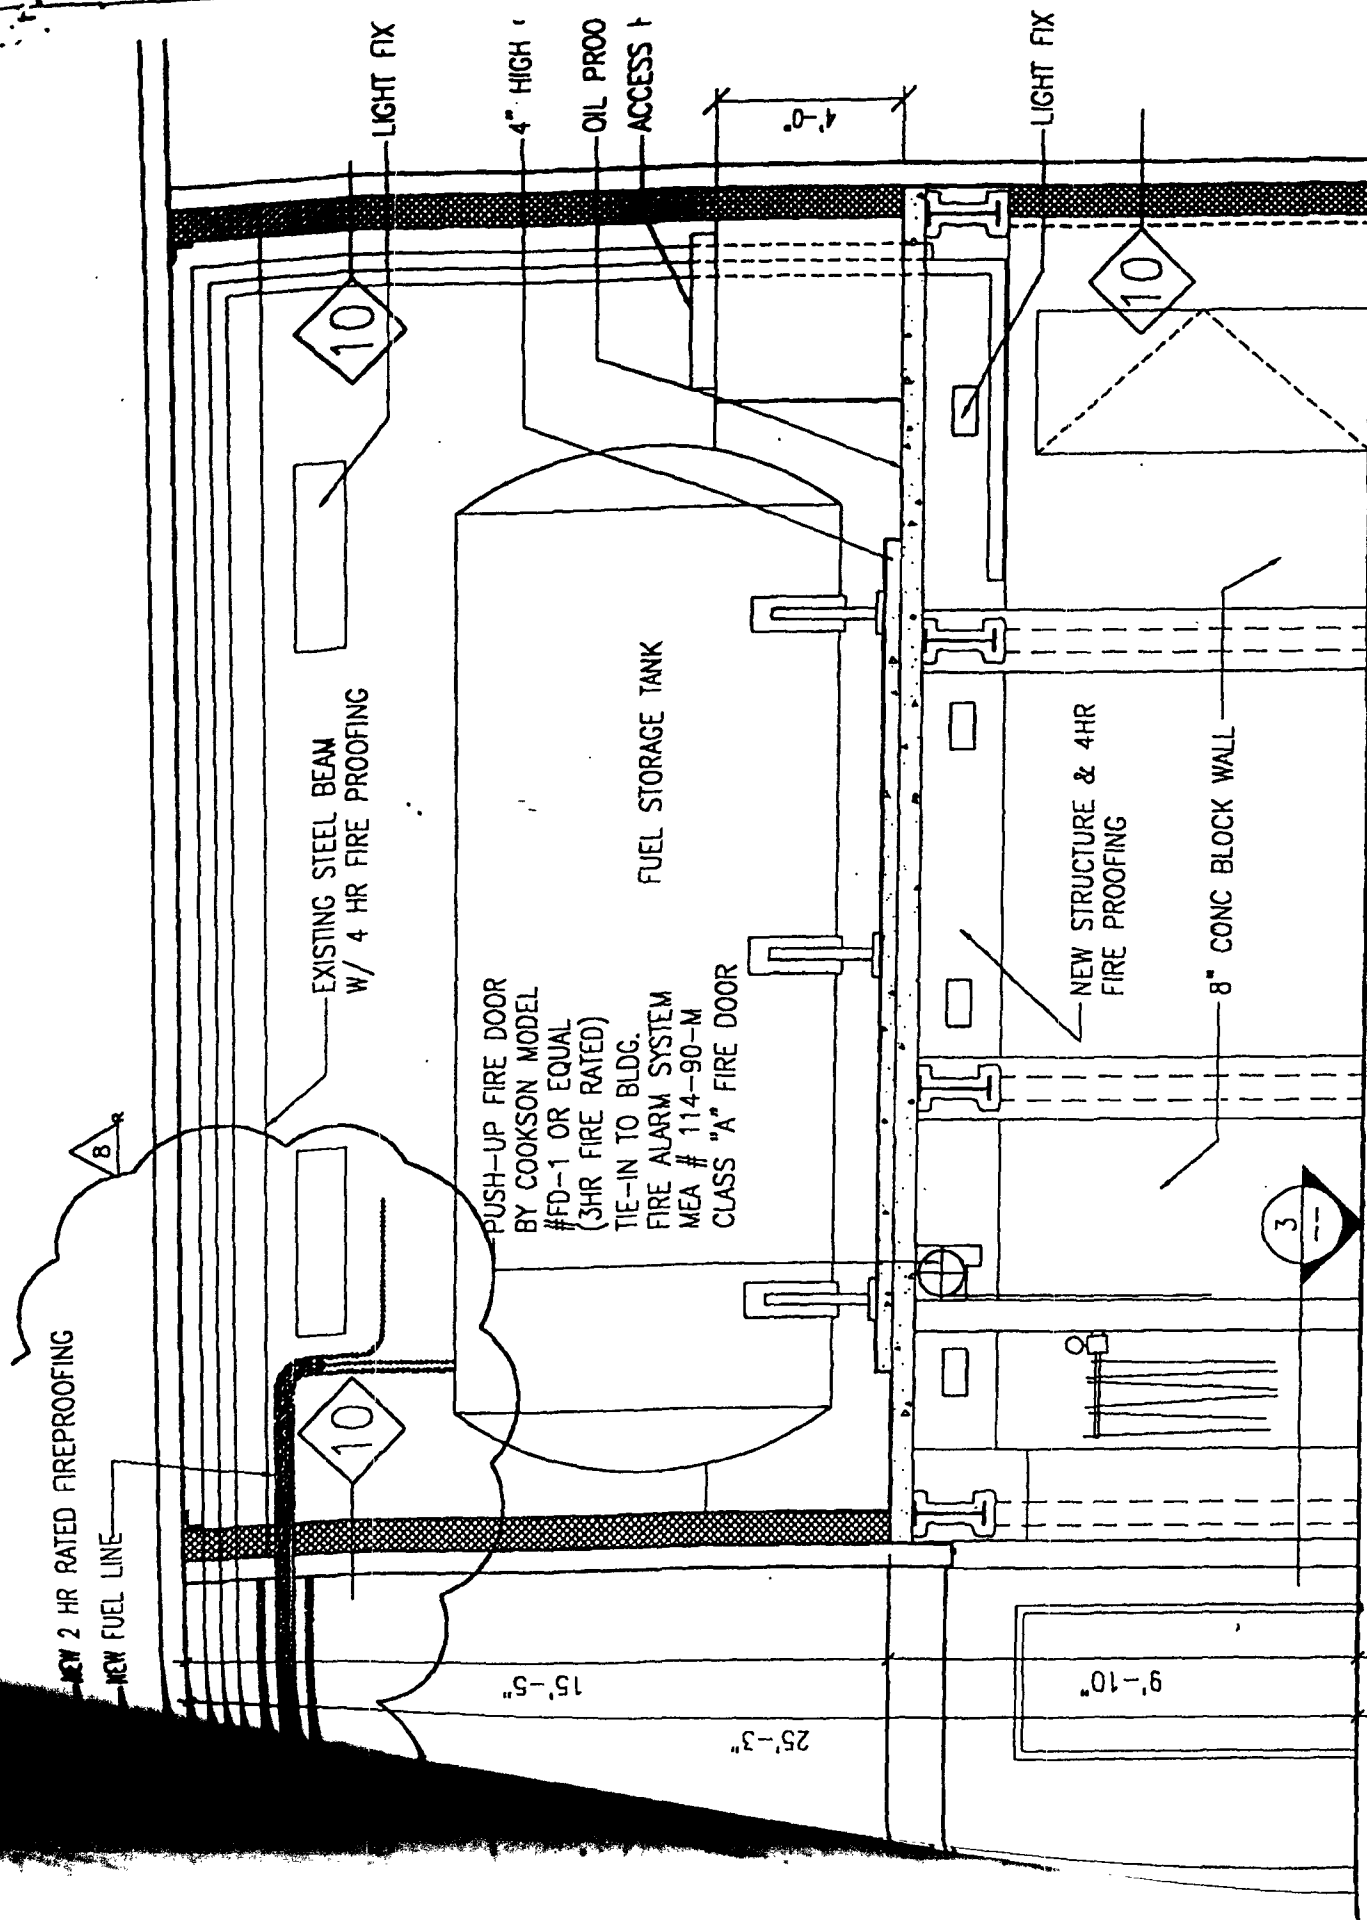

NOTE:

20' LIMIT HT. # (4) 16" o.c. MAX. VEF
W/ HORIZONTAL MASONRY REINFORCING

SECTION - FUEL OIL TANK RM

8