

9/99 19:02 FAX 2122190256

SWANKE HAYDEN CONNELL

9144694778

0002
P.02


ALTO-SHAAM. Cooking and Holding Ovens

- ◆ HALO HEAT... a controlled, uniform heat source that gently cooks, holds and surrounds foods for better appearance, taste, and longer holding life.
- ◆ Cooks, roasts and holds meat, poultry, fish, potatoes, casseroles, vegetables, and reheats frozen convenience foods in the same cabinet.
- ◆ Reduces product shrinkage.
- ◆ Induces natural enzyme action in meat for tenderizing.
- ◆ Retains more product moisture, flavor, and minerals.
- ◆ Provides uniform and consistent cooking, day after day.
- ◆ Reduces labor and evens-out work loads.
- ◆ Non-magnetic stainless steel interior, side racks, and wire shelves resist corrosion.
- ◆ No oven hoods or outside venting required (most areas).
- ◆ No fire extinguisher system required.
- ◆ Adjustable thermostats:
 - Cooking 100° to 325°F (38° to 163°C)
 - Holding 60° to 200°F (16° to 93°C)

**1000-TH-I
SERIES**

Price?
\$2700⁰⁰ AS per

Swanke

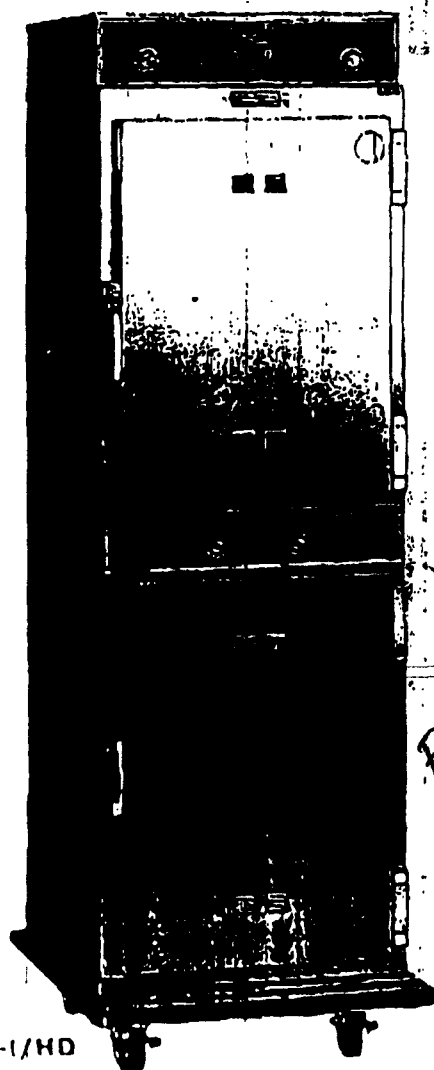

MODEL 1000-TH-I/HD



1000-TH-I/STD


List Price \$7,223.00
EAB marketing
Distributors
(516) 694-0300

**HALO
HEAT.**

307A



Sizes and Specifications

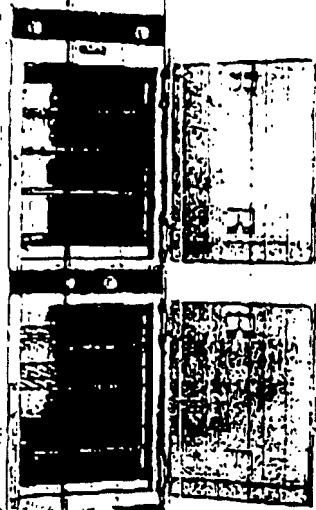

1000-TH-1/HD

1000-TH-1 LOW TEMPERATURE COOKING & HOLDING OVENS

Oven controls feature two (2) ON/OFF switches; two (2) cook thermostats, 100° to 325°F (38° to 163°C); two (2) hold thermostats, 60° to 200°F (16° to 93°C); and two (2) twelve-hour cooking timers. Control panel includes two (2) cooking indicator lights, and two (2) holding indicator lights.

MODEL 1000-TH-1/HD *All Stainless*

Two (2) separately controlled oven compartments enclosed in one exterior cabinet. Exterior of 22 gauge stainless steel. Two (2) 18 gauge, non-magnetic stainless steel doors with magnetic door latch. Stainless steel wire shelves, side racks, and drip pans are removable for easy cleaning. The oven includes an external drip tray with removable pan, one (1) full-perimeter bumper, and one (1) set of 5" (127mm) heavy duty casters — 2 rigid, and 2 swivel with brake.

MODEL 1000-TH-1/HD/D

...is the same as above with a 12" x 16" (305mm x 406mm) window in each door.

MODEL 1000-TH-1/STD



Two (2) separately controlled oven compartments enclosed in one exterior cabinet. Exterior of .040" stucco aluminum. Two (2) 18 gauge, non-magnetic stainless steel doors with magnetic door latches. Stainless steel wire shelves, side racks, and drip pans are removable for easy cleaning. Oven includes external drip tray with removable pan, one (1) set of 5" (127mm) heavy duty casters — 2 rigid, and 2 swivel with brake.

MODEL 1000-TH-1/STD/D

...is the same as above with a 12" x 16" (305mm x 406mm) window in each door.

SPECIAL INFORMATION

- Each oven is equipped with a voltage conversion switch, located on the back of the oven, for voltage selection (208 V.A.C. to 240 V.A.C.) at time of installation.
- Right-hand door swing is standard. Left-hand doors are available as a special order.

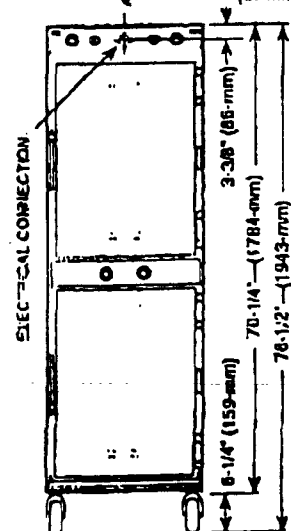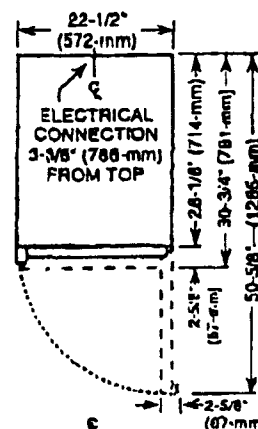

MODEL	1000-TH-1/HD	1000-TH-1/HD/D	1000-TH-1/STD	1000-TH-1/STD/D
PRODUCT CAPACITY	120 lb (54 kg) maximum per compartment			
INTERIOR	18 gauge non-magnetic (non-corrosive) stainless steel — Four (4) non-magnetic stainless steel side racks with shelf rungs spaced at 2-15/16" (≈ 50mm) centers — Six (6) non-magnetic stainless steel wire shelves — Two (2) stainless steel drip pans			
INSIDE DIMENSIONS	W x D x H per compartment: 18-7/8" x 26-1/2" x 26-3/4" (479mm x 673mm x 680mm)			
PAN CAPACITY	FULL-SIZE SHEET PANS — Eight (8) per compartment: 18" x 26" x 1" (3 pans per unit)			
ELECTRICAL	208-240 V.A.C. — 60 Hz, 1 ph 6000 Watts (max.) 28.8 Amps (max.) NO CORD & PLUG			
	220 V.A.C. — 50 Hz, 1 ph 5700 Watts (max.) 28.8 Amps (max.) NO CORD & PLUG			
NET WEIGHT	385 lb (175 kg)	394 lb (179 kg)	349 lb (159 kg)	358 lb (163 kg)
SHIP WEIGHT	429 lb (193 kg)	435 lb (197 kg)	380 lb (177 kg)	400 lb (181 kg)
OPTIONS & ACCESSORIES	Bumpers — Corner Guards 5221 — Full Perimeter 4994 Carving Holders — Prime Rib Holder HL-2635 — Ship Round Holder 4459 Drip Pan, Extra Large 1115 Key Lock Handle LK-22567 Legs, 6" (152mm) 5205 Pocket Thermometer °C, TH-3412 Security Panel with Key/Locking Handle — Upper Panel 4372 — Center Panel 4368 Shelves — S/S Flat Wire SH-2325 — S/S Rib Rack SH-2773 Wire Pan Grid — 18" x 26" Pan Insert .. PN-2115 Pocket Thermometer °F, TH-3300			

HALO HEAT COOK/HOLD/SERVE SYSTEMS BY ALTO-SHAAM.
 W184 N8221 Water Street • P.O. Box 450 • Menomonie Falls, Wisconsin 54052-0450 • U.S.A.

PHONE: (715) 51-3800 (800) 558-8744 FAX: (715) 51-7067 (800) 327-8744

PRINTED IN U.S.A.

#37A — 1/87

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE