



Founded 1931

Fabricators & Erectors of Structural and Ornamental Iron

May 19, 1998

Ambassador Construction Co., Inc.
317 Madison Avenue
New York NY 10017

126-85 WILLETS POINT BOULEVARD
FLUSHING, NEW YORK 11368
Telephone: 718-899-8300
Fax: 718-335-3243

Att; Mr. Jack Klein;

RE: MAYORS OFFICE OF EMERGENCY MANAGEMENT
7 WORLD TRADE CENTER N.Y.

Dear Jack;

We are pleased to quote on furnishing & installing the structural steel, metal decking and miscellaneous metal items as outlined on page 2 of 2 of this estimate, for the above referenced project, during normal working hours and as seen on drawings prepared by the Cantor Seinuk Group Eng. & Swanke-Hayden & Connel Architect dated 5/4/98 for the total price of Two Hundred and Ninety Five Thousand Dollars.(\$295,000.00)


Our shop paint is our standard grey oxide. All steel which is to receive spray on fireproofing will not have a shop coat of paint. Our price is based upon having clear and unobstructed access into and around the site for our men and machines during normal working hours. All permits by others.

Our price excludes electrical hookup of welding machines, smoke removal or ventilation, field painting or touch ups, pe stamp or seal on drawings, demolition, shoring, removal of existing materials, grouting or patching, testing or controlled inspections, reinforced or unreinforced beam penetrations, wall panels @ radio room, angle clips @ 3/A23-2, Screen supports, bullet resistant panels, Folding door supports, 14gage metal plates @ A/V enclosures, raised floor materials, light or T.V. brackets, Metal ramp @ 10/D9, elevator charges, standby trades.

We thank you for your inquiry and trust you will not hesitate to call with any questions you might have.

Very Truly yours
FEINSTEIN IRON WORKS INC.

Daniel Feinstein
djfmp
ambassadormayors

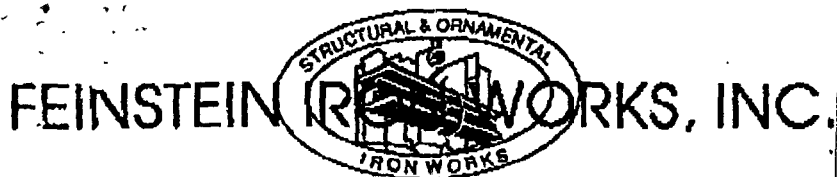

Founded 1931

Fabricators & Erectors of Structural and Ornamental Iron

May 19, 1998

Ambassador Construction Corp. Inc.

Att; Mr. Jack Klein;

126-85 WILLETS POINT BOULEVARD
FLUSHING, NEW YORK 11368
Telephone: 718-899-8300
Fax: 718-335-3243

Re: MAYORS OFFICE OF EMERGENCY MANAGEMENT

SCOPE OF WORK INCLUDED IN BID

- 1) F & I structural steel framing. —
- 2) F & I metal floor decking. (as specified) —
- 3) F & I steel frame with posts & McNichols grating @ fuel oil pump room —
(page A1-1 & Sect 9)
- 4) F & I one (1) new bilco door & rung type ladder — Page A1-1 —
- ALTERNATE 5) F & I new wire mesh Wall @ 7'-0" high with two (2) swinging gates with locks. — 7,500⁻
(P A 23-1)
- 6) F & I 2 x 2 @ 6" long angle clips @ top of masonry partition wall. Approximately
75 linear feet (or 75 clips) @ partition type 10 only (P A1-1)
- 005 7) F & I steel tubes @ A/V enclosures Page D-3. (two (2) sections only. Tubes to be
bolted to floor and ceiling. Tubes @ 2 x 2 to be strapped together. Tubes @ 4 x 4
to be erected loose. Layout of location by others. — 9,000⁻
- 8) F & I 1/4 plate walls, Ceilings & Floor, @ room 12 x 10 x 9'-0" high @ page D-10.
Plates to be seam welded together (no grinding of welds). Channel framing at
walls & ceilings to be bolted together. Access with freight elevator assumed to
deliver & unload materials.
- 9) Furnish only to be installed by others one (1) galvanized tube frame (4 x 4 tube) 2,800⁻
@ door @ section 3/D12.
- ALTERNATE 10) F & I five (5) Antenna support frames on page S5. — 33,000⁰⁰
- 11) F & I steel @ roof of Radio Room — Page S4. —

Any and all other work other than specifically included in this estimate is excluded
from this proposal.

page 2 of 2

295,000⁻