


05/26/98 14:35 RAISED FLOOR INSTALL
MAY-26-'98 TUE 15:31 ID:RAISED FLOOR INSTALL TEL NO:973 778 8052

#842 P01

RAISED FLOOR INSTALLATION, Inc. *Established 1964*

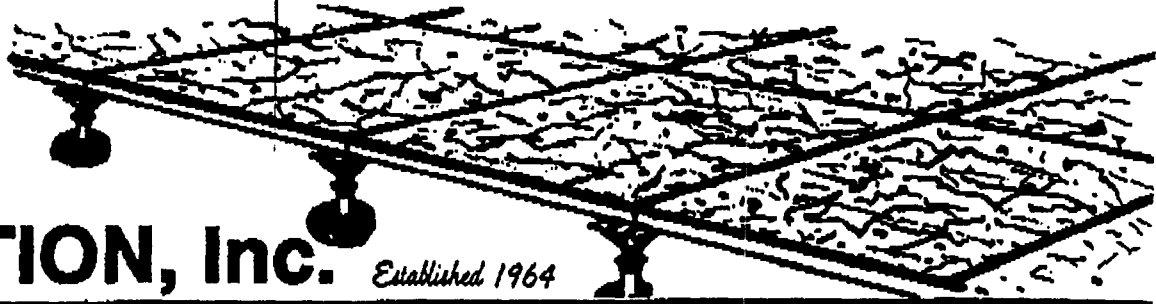

9 Sebago Street • Clifton, New Jersey 07013 • Telephone: N.J. (973) 778-2444 • N.Y. (212) 594-4039 • Fax: N.J. (973) 778-8052

May 26, 1998

Ambassador Construction Co.
317 Madison Ave.
New York, NY 10017

ATTN: Jack Klein

RE: Mayor's Office of Emergency Mgmt.
7 WTC, NYC - 23rd floor
RFI Rev. 1


S = 11,220 sq

We estimate the raised floor work to be done at the above location will cost \$102,000.00. This Estimate Includes:

1. Supply and Installation of 1,414 square feet of new C-Tec bare Crete 2 panels with a bolted stringer understructure for the finished floor height of 4-inches. The majority of this area involves Room 23-42. This area will be covered with carpeting (Supplied and Installed by others), / (See Notes A and C).
2. Supply and Installation of 5,622 square feet of new C-Tec bare Crete 2 panels with a bolted stringer understructure for the finished floor height of 4-inches. This area will be covered with carpeting (Supplied and Installed by others (See Notes A and C).
3. Supply and Installation of 2,408 square feet of new C-Tec bare Crete 2 panels with a bolted stringer understructure for the finished floor height of 8-inches. This area will be covered with carpeting (Supplied and Installed by others (See Notes A and C).
4. Supply and Installation of 892 square feet of new C-Tec bare Crete 2 panels with a bolted stringer understructure. This area involves the Press Room (#23-53). This area will be covered with carpeting (Supplied and Installed by others). The majority of this area will have an 8-inch finished floor height. There will be 2 raised areas in the back of the room (20-inch finished floor height and 32-inch finished floor height), (See Notes A and B).
5. Supply and Installation of 132 square feet of new C-Tec bare Crete 2 panels with a bolted stringer understructure for the finished floor height of 16-inches. This area will be covered with carpeting (Supplied and Installed by others), (See Notes A and C).
6. Supply and Installation of 432 square feet of new C-Tec bare Crete 2 panels with a bolted stringer understructure for the finished floor height of 25-inches. This area involves Room 23-02. This area will be covered with carpeting (Supplied and Installed by others). (See Notes

7. Supply of 3 panel lifters.
8. Supply and Installation of 5 ramps totaling 124 $\frac{1}{3}$ square feet.
9. Supply and Installation of 226 linear feet of fascia and trim.
10. Supply and Installation of 5 RFI standard, wall-mounted, clear-anodized aluminum handrails totaling 39 linear feet.
11. Supply and Installation of 3 RFI standard, floor-mounted, clear-anodized aluminum handrails totaling 18 linear feet.
12. Supply and Installation of 4 triple-riser steps.
13. Supply and Installation of 46 linear feet of double-riser steps.
14. Cutting and trimming of 200 cable cutouts (quantity approx - see unit prices).
15. Pre-marking of the pedestal locations on 10-foot centers.
16. Delivery and Installation during normal working hours.

RAISED FLOOR INSTALLATION, Inc. *Established 1964*

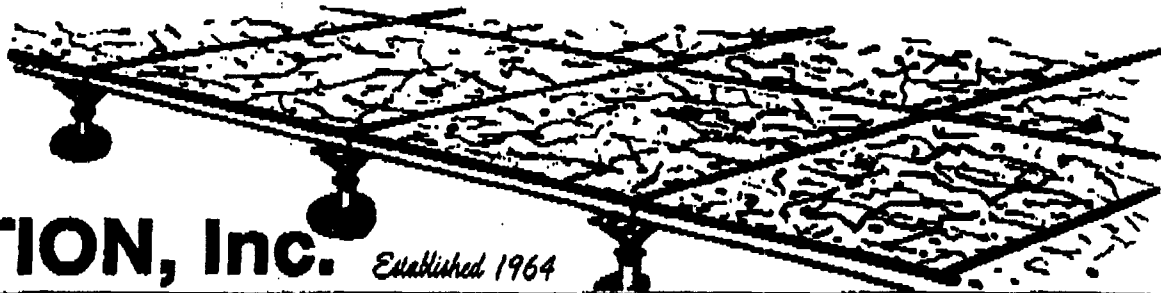

19 Sebago Street • Clifton, New Jersey 07013 • Telephone: N.J. (973) 778-2444 • N.Y. (212) 594-4039 • Fax: N.J. (973) 778-8052

Page 2 - Mayor's Office of Emergency Mgmt.
7 WTC, 23rd floor

This Estimate does not Include:

1. Sales Tax. We assume this project is tax exempt.
2. Supply or Installation of electrical grounding equipment, plenum divider, a/c unit cutouts, air registers, perforated panels, grommets, boxes/hatches, covebase, spare material, waiting time, overtime, floor cleaning, concrete sealant, hardboard/kraft paper covering, a pre-installation field test of the pedestal adhesive (See Note D), etc.
3. Supply and Installation of additional trimmed cable cutouts @ \$26.00 each (done during the initial installation).

NOTES:

- A. Enclosed please find technical information on the C-Tec Crete 2 raised floor system we are proposing.
- B. Handrails were not indicated by the higher areas in the Press Room. We have not included any handrail work by these areas.
- C. The overall raised floor area amounts to 10,900 square feet.
- D. A pre-installation adhesive to sub-floor field test is a trial and error method of determining compatibility between pedestal adhesive and concrete sealant.

Sincerely,

RAISED FLOOR INSTALLATION, INC.

Eric H. Lagerstrom
Eric H. Lagerstrom

EHL2/pal
Enc.



Key to a Better Computer Room