


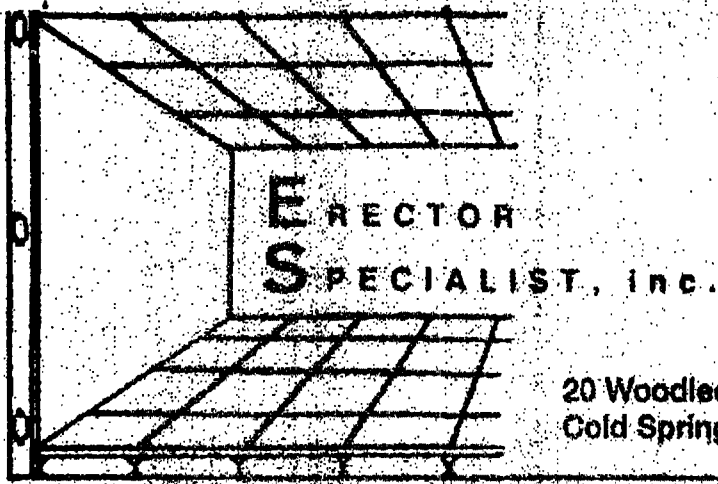

- RAISED FLOOR INSTALLATION AND SERVICE
- ACOUSTICAL CEILING
- DRY WALL PARTITIONS

20 Woodlee Road • Tel. (516) 692-4424
Cold Spring Harbor, New York 11724 Fax (516) 692-4428

May 13, 1998

Ambassador Construction Co., Inc.
317 Madison Ave.
New York, NY 10017

Attn.: Martin Schnietter

Re: Office of Emergency Management, 7 World Trade Center, 23rd Floor, New York, NY

We propose to furnish and install 6846 SF of Interface AR Tec Crete II raised floor system with bare panel finish on bolted rigid grid stringer with gasket understructure to a finished floor height of 4", to furnish and install 2294 of same to a finished floor height of 8", to furnish and install 130 SF of same to a finished floor height of 16", to furnish and install 110 SF of same to a FFH of 20", to furnish and install 456 SF of same to a FFH of 25", to furnish and install 88 SF of same to a FFH of 32" and to furnish and install 756 SF of Interface AR Tec Crete II raised floor system with Vinyl Composition Tile finish TQ-218 by Azrock on bolted rigid grid stringer with gasket understructure to a finished floor height of 8". The following will be included:

1. Presnap pedestal locations 10' on center.
2. Overtime unloading.
3. 5 Ramps: 141 SF includes all.
4. 1 - 4" Step: 22' wide at Press room.
5. 2 - 3 Riser Steps 4' wide at Press room risers.
6. 2 - 3 Riser Steps 4' wide at Podium.
7. 1 - 6" Step 24' wide at riser opposite Podium.
8. 22 LF of floor mounted clear anodized aluminum handrail.
9. 19 LF of wall mounted clear anodized aluminum handrail.
10. 144 LF of aluminum fascia.
11. 85 cutouts with trimmed edges.


Subtotal	\$95,292.97
Tax	\$7,262.03
Cost:	\$102,555.00

05/14/1998 06:57 5166924428

ERECTOR 7ECIALIST

PAGE 03

Date Accepted _____ E. S. Inc.



Ambassador Construction Co., Inc.

John J. McCoy III

All work to be done during normal working hours unless otherwise specified by competent men covered by liability, compensation and property damage insurance.